

# PRODUCT DATASHEET

## GLOBAL TAG UHF 9319



Global Tag **UHF 9319** is a RFID UHF antenna design which has been developed to be mounted on windshield. It is also an excellent solution for asset management and goods tracking.

This product can be supplied in the form of wet-inlay, paper label, PET/PP label.

Different customizations are available such as die-cut label size, encoding of EPC/memory, or content printing.



### MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS

**Antenna Size:** 93x19mm

**Wet inlay size:** 96x22mm

**Paper/PP/PET label size:** 96x22mm

**Pitch Size:** 25,4mm

**Gap:** 3,4mm

**Web Width:** 106mm

**Mounting System:** Glue, (optionally 3M 467 adhesive or Removable Glue)

**Antenna Material:** Aluminum


**Storage Temperature:** +10°C to +35°C (sealed in the vacuum bag and avoid direct sunlight exposure)

**Storage Humidity:** 30% to 70% RH (sealed in the vacuum bag and avoid direct sunlight exposure)

**After gluing Temperature:** -20°C to +50°C

**After gluing Humidity:** 20% to +80% RH

**Delivery format:** in reel

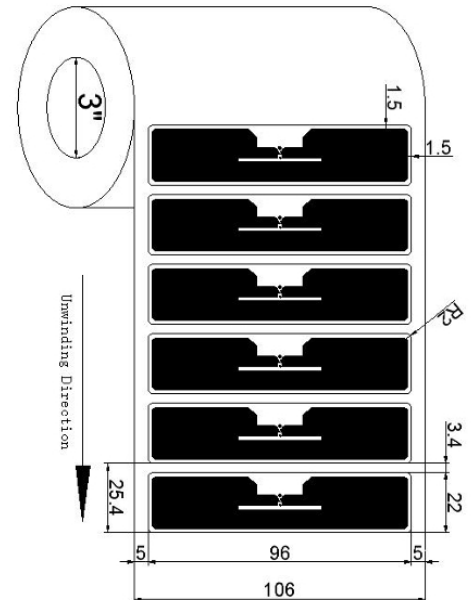

### IC CHIP SPECIFICATION

|                        |                       |
|------------------------|-----------------------|
| Operation Frequency    | UHF 860-960 Mhz       |
| Air interface protocol | UHF EPC Class 1 Gen 2 |
| IC Type Available      | Alien AH9             |
| TID Memory             | 48bit                 |
| EPC Memory             | Up to 496bit          |
| User Memory            | -                     |

### READING DISTANCE

With long range fixed reader: ----- EU frequency 0 ~ 6,5m (2W ERP) ----- US frequency 0 ~ 12m (4W EIRP)

### INSTALLATION MODE

**With permanent strong glue:** when mounting the tag with adhesive background, clean and dry the surface to obtain the maximum bond strength. The range temperature must be +10°C to +40°C and humidity range 20% to +80% RH



## CUSTOMIZATION OPTIONS

**Printing:** 4-color or monochrome logo, Progressive number, Serial number from database, Barcode or QRCode

**Encoding:** Writing contents in EPC/User Memory (optionally from customer's database)

**3M glue:** According to the project requirement and basing on the surface material we can supply special adhesive

## ORDER INFORMATION

Standard products have these available size

**PRODUCT CODE WET-INLAY:** GT-WT9622-AH9

**PRODUCT CODE PAPER LABEL:** GT-PL9622-AH9

**PRODUCT CODE PET LABEL:** GT-PET9622-AH9

**PRODUCT CODE PP LABEL:** GT-PP9622-AH9

For further information or customization request:

**Global Tag Srl** – Via Zanardelli 13/A 25062 Concesio (BS) - Italy

P +39 030 2005259

S [global-tag](https://www.global-tag.com)

W [www.global-tag.com](https://www.global-tag.com)

M [sales@global-tag.com](mailto:sales@global-tag.com)

## DISCLAIMER

The information in this document is subject to change without notice. Global Tag assumes no responsibility for any errors that may appear in this document.

Application recommendations are guidelines only - actual results may vary and should be confirmed. This is a general-purpose product not designed or intended for any specific application.

Global Tag Srl or its subsidiaries are not responsible for the performance or support of third-party products and does not make any representations or warranties whatsoever regarding quality, reliability, functionality, or compatibility of these devices or products.

© Copyright 2024 - Global Tag Srl